



Vibratory rammers


PPS 62 H

PPS 72 H

PPS 80 D



Technical data

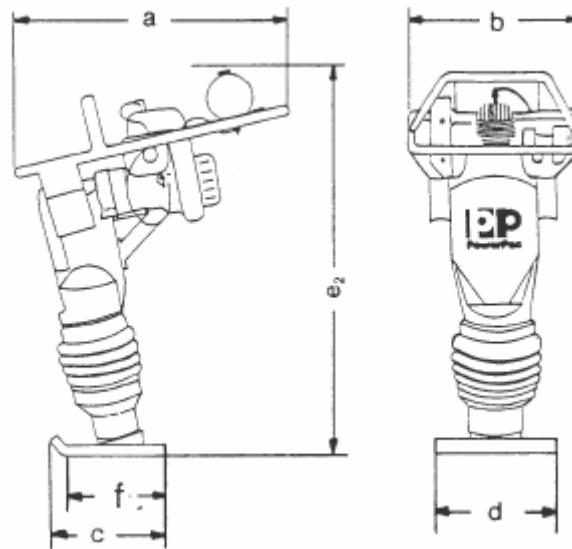

Type	a	b	c	d	e	f
PPS 62 H	755	420	330	280	1055	280
PPS 72 H	755	420	330	280	1055	280
PPS 80 D	750	430	330	280	1140	280

Type	PPS 62 H	PPS 72 H	PPS 80 D
Engine	Honda	Honda	Hatz
Constructor	GX 100	GX 120	1 B 20
Model	4 - stroke petrol	4 - stroke petrol	4 - stroke diesel
Type	100 cm ³	120 cm ³	230 cm ³
Displacement	2,2 kW (3 HP)	2,9 kW (4 HP)	3,7 kW (5,0 HP)
Engine output	3600	3450	3750
RPM	reversing starter	reversing starter	reversing starter
Starter	dry cell	dry cell	dry cell
Air filter	pipe filter	pipe filter	pipe filter
Fuel filter			

Operational characteristics			
Weight	62 kg	72 kg	80 kg
Centrifugal force	13 kN	13 kN	16 kN
Footprint	742 cm ²	742 cm ²	644 cm ²
Percussion rate*	560-620 /min	560-620 /min	690 /min
Stroke	70 mm	70 mm	70 mm
Compaction depth*	60-70 cm	60-70 cm	60-70 cm

*depending on soil

Authorised dealer:



Baumaschinen GmbH

Niederhöchstädter Str. 71-73 D-61476 Kronberg
 Tel.: +49-(0)6173-68558 Fax: +49-(0)6173-68548
 E-Mail: info@powerpac.de Internet: www.powerpac.de