





Rotary Tiller

MF5



Rotary Tiller MF5

Technical Data

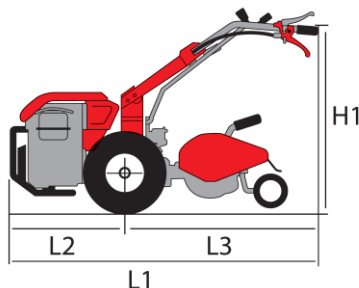

| | |
|----|----------|
| L1 | 1800 |
| L2 | 690 |
| L3 | 1110 |
| H1 | 1470-630 |
| W1 | 370 |
| W2 | 800-400 |

| | |
|------------------|--------------------------|
| Engine | |
| Honda | GX270 |
| Type | 1 cyl. / 4-stroke petrol |
| Displacement | 270 cm ³ |
| Engine output | 6,6 kW (9 HP) |
| Revolution speed | 3600/rpm |
| Starter | reversing starter |
| Air filter | dry cell |
| Fuel filter | gauze |

| | |
|---------------|-------------------------------|
| Clutch | Hand-Operated dry disc clutch |
|---------------|-------------------------------|

| | | | | | | | | | | | | | | | | |
|--|---|------|----|------|----|------|------|---|--|----|------|------|---|--|----|------|
| Operational characteristics | | | | | | | | | | | | | | | | |
| Weight (incl. tiller and tyres) | 130 kg | | | | | | | | | | | | | | | |
| Working speed: | <table border="0"> <tr> <td>1.26</td> <td>1</td> <td></td> <td>1R</td> <td>1.33</td> </tr> <tr> <td>2.64</td> <td>2</td> <td></td> <td>2R</td> <td>2.79</td> </tr> <tr> <td>4.37</td> <td>3</td> <td></td> <td>3R</td> <td>4.62</td> </tr> </table> | 1.26 | 1 | | 1R | 1.33 | 2.64 | 2 | | 2R | 2.79 | 4.37 | 3 | | 3R | 4.62 |
| 1.26 | 1 | | 1R | 1.33 | | | | | | | | | | | | |
| 2.64 | 2 | | 2R | 2.79 | | | | | | | | | | | | |
| 4.37 | 3 | | 3R | 4.62 | | | | | | | | | | | | |
| 3 forward and 3 reverse gears EN 709 Norm | | | | | | | | | | | | | | | | |
| Tyres | AS Tyres 5.00-10" | | | | | | | | | | | | | | | |
| Transmission | Reverse gear unit with easy shift gears | | | | | | | | | | | | | | | |
| Steering bar | Steel tube bar on silent bearings 180° swivel height and side adjustment by hand | | | | | | | | | | | | | | | |
| PTO | Transmission independent PTO with reversing stop | | | | | | | | | | | | | | | |
| Differential | with limited slip differential | | | | | | | | | | | | | | | |
| Safety | Dead man's brake on steering bar | | | | | | | | | | | | | | | |
| Extra | Trailer coupling | | | | | | | | | | | | | | | |

Optional accessories:

- Ridge Plow 180°
- Grubber 1mtr. / 1,3mtr.
- Tiller 60cm (adjustable 50-35cm) ; Tiller 70cm (Standard) (adjustable 58-48-40cm)
- Snow Blade 80cm or 100cm
- Rotary Sweeper 100cm pivoting brush roller diameter 38cm
- Bar Mower kpl. 102cm or 122cm with oil bath drive incl. runners
- Drum/Rotary Mower 70cm 2 x rotary blades
- Sickle Mower 70cm
- Flail mower 65cm
- Snow Blower 60cm discharge throwing distance 10-15m
- Trailer max. Payload 500kg, dimensions platform: 1370x1003x300mm, tyres 155 R 13

Authorised dealer:



**PowerPac
Baumaschinen GmbH**

Niederh ochst adter Str. 71-73 D-61476 Kronberg
Tel.: 0049-(0)6173-68558 Fax: 0049-(0)6173-68548
E-Mail: info@powerpac.de Internet: www.powerpac.de